

CLUB 128

USB to DMX interface



FREE SOFTWARE & APPLICATION DOWNLOAD

Our professional package for entry-level budgets and users seeking an easy-to-operate DMX control system.



Newly designed aluminium housing with beautiful finish and updated electronics that work with all the latest 2022 Chromateq software (as well as older versions of LED Player and Pro DMX).

Capable of 3 trigger options and equipped with DC 5-18V input this USB to DMX controller includes USB 5V power supply and an optional infrared remote control in the package.

It is the perfect hardware for easy integration projects.

CLUB 128 XLR

CLUB 128 TB

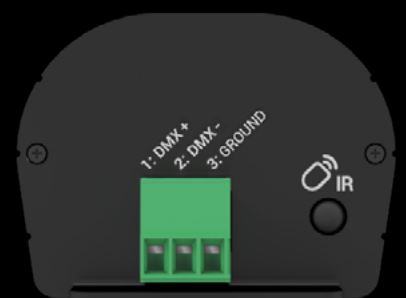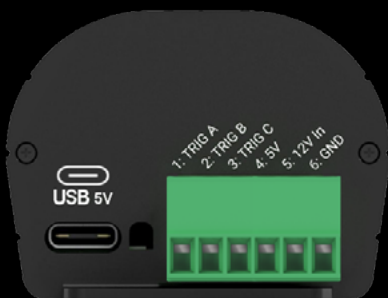

HARDWARE Features

DMX output	128 Out channels PC and 128 Out Stand Alone
Input	USB-C (5V. DC, 0.1A)
Zone	1 Zone, play 1 scene/sequence at time in Stand Alone
Memory	Internal memory (200 KB, 200 to 2000 DMX step capacity)
Infrared (scenes, play, pause, dimmer, speed)	Additional Infrared commands and additional commands on triggers
DMX Modes	DMX In/Out, DMX Record, DMX Trigger
Stand Alone Options	16-bit and fine channel management Cross Fade time between scenes Default start scene when power up
Triggers	Triggers (On, On/Off, Release, Restart, Scene, Commands and function Controls, Priority) Infrared receiver (Optional Remote control) Infrared options: 15 scene selection, speed, dimmer, pause, stop, next
Max DMX outputs (USB)	x12 USB interfaces connected = 12 DMX max
Power	DC In USB-C 5V DC + 5-18V DC Input on Terminal Block
Dimensions (mm / in)	H: 55 (2.16), W: 50 (1.96), D: 37.5 (1.47)
Weight	0.85 Kg (1.87 lb)
Housing	Strong Aluminum
I/O Connectors	USB-C 2.0, 3 pin XLR (XLR5 optional)
Operating Temperature	-40 to +85 C°
IP Rating	IP40
Certifications	CE, LVD, RoHS
International Warranty	1 year



SOFTWARE Features

PRO DMX 2	Yes, up 64x512 DMX output max
PIXXEM	No
LED PLAYER	Yes, up 64x512 DMX output max
PRO DMX	Yes, No Audio and Video Timeline
STUDIO DMX	Yes, 3D viewer in real time (Full mode)
WI-LIGHT 2 - APP	Yes, Software LAN control from PC, Tablet, Mobile
Art-Net Output from PC	No
System Compatibility	Windows, iOS, Linux, Raspberry
Worldwide Technical Support	Yes, English, French, Spanish, Chinese

Mobile minimum configuration :

Android 5 / iOS 10 and +
1Ghz CPU, 1 Gb RAM, 60 Mb disk

Configuration minimale PC :

Windows, Mac OS, Linux (32 and 64 bits)
2Ghz CPU (2 cores), 8 Gb RAM
2Gb RAM graphic card (for 3D only)
600 Mb disk, 1920x1080 resolution
1 USB port (Device)
1 Ethernet Port (for Art-Net & sACN)